


HHTSPT4GLTE


HOW TO CONFIGURE APN SETTINGS

To manually setup APN settings of your mobile operator, proceed as follows.


1. Connect to the HHTSPT4GLTE modem via Wi-Fi (Wi-Fi password is shown on the back of the device).
2. Access the web configuration page of the modem at <http://192.168.100.1> address.
3. Press the "LOGIN" button to access the device.

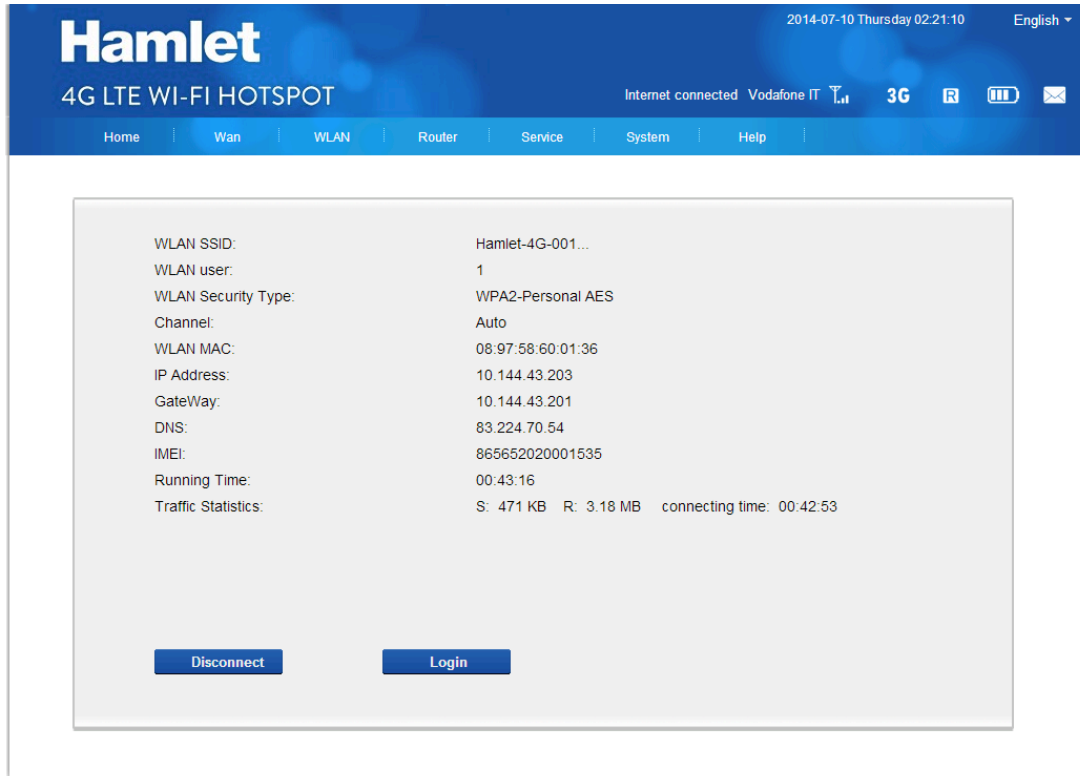

4. Log in by entering the access data (user: admin, password: hamlet).

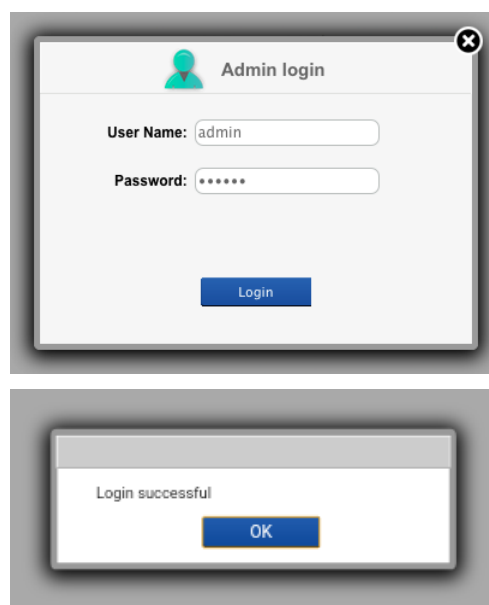

5. Enter the menu "WAN" > "APN Profile".

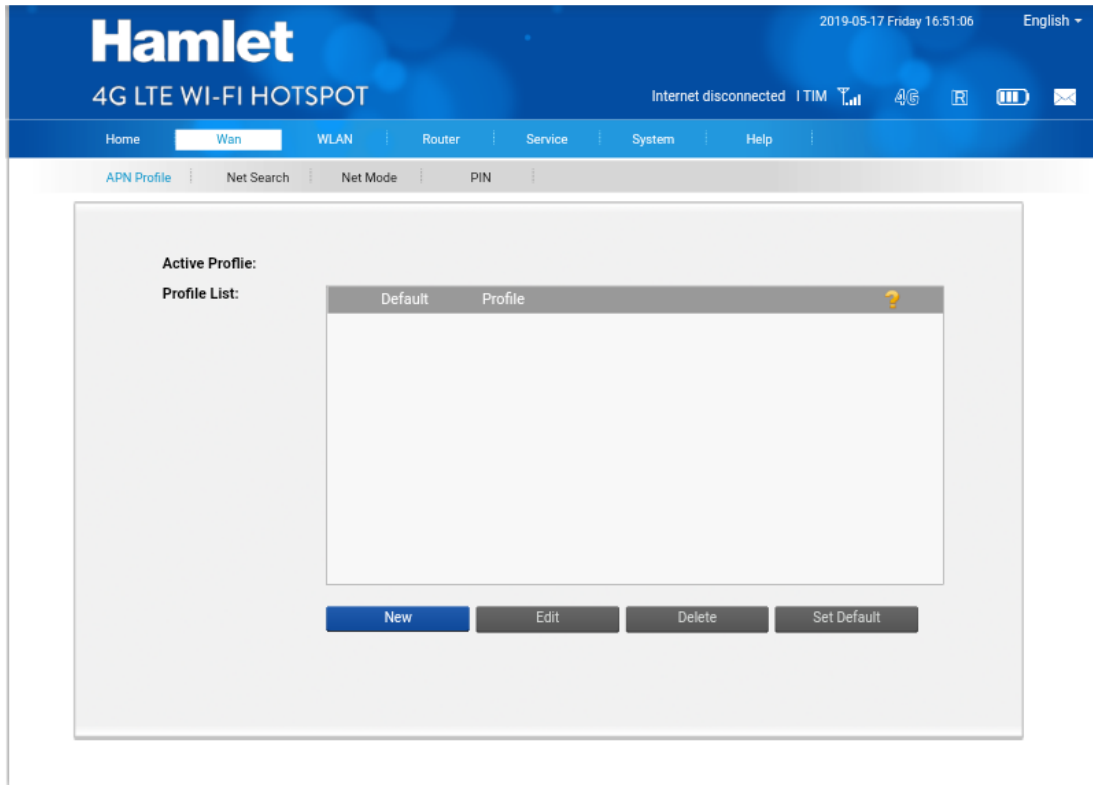

6. Press the "New" button to add a new APN by entering the APN settings of your mobile operator. In the example below are shown the settings for Fastweb mobile operator.


The screenshot shows the APN configuration form for Fastweb mobile operator. The form fields are:

- *Profile Name: FW WEB
- User Name: (empty)
- Password: (empty)
- APN: apn.fastweb.it
- Tel: (empty)
- Auth. Type: None
- Network Mode: 4G
- Connect Mode: IPv4/v6
- Set Default:

A "Save" button is located at the bottom of the form.

7. Select "Set Default" to use the new APN profile as the default.

8. Press the "Save" button to save settings.

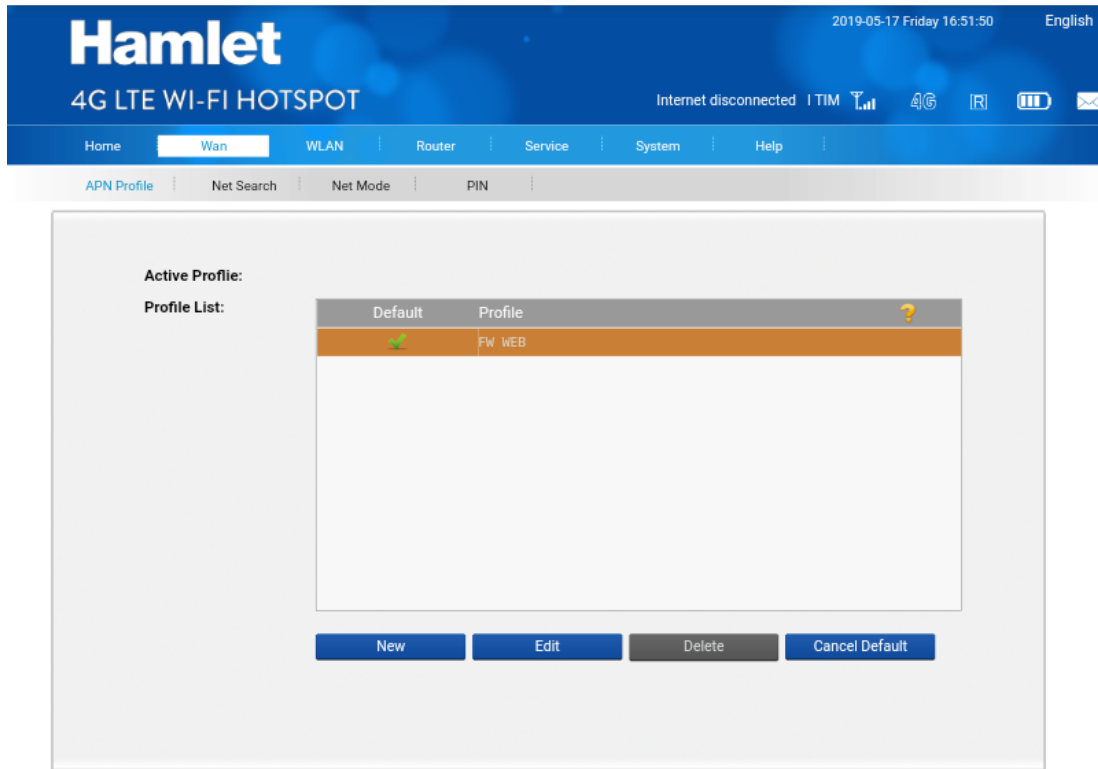

9. Press the "Home" button and select "Connect" to connect to the data network. At top right of the window you can check information related to the connection status.

