


HHTSPT3GM21 – HHTSPT3GM42 HOW TO CONFIGURE APN SETTINGS

To manually setup APN settings of your mobile operator, proceed as follows.


1. Connect to the HHTSPT3GM21/HHTSPT3GM42 modem via Wi-Fi (Wi-Fi password is shown on the back of the device).
2. Access the web configuration page of the modem at <http://192.168.100.1> address.
3. Enter the password "hamlet" in the appropriate field to access to the device.

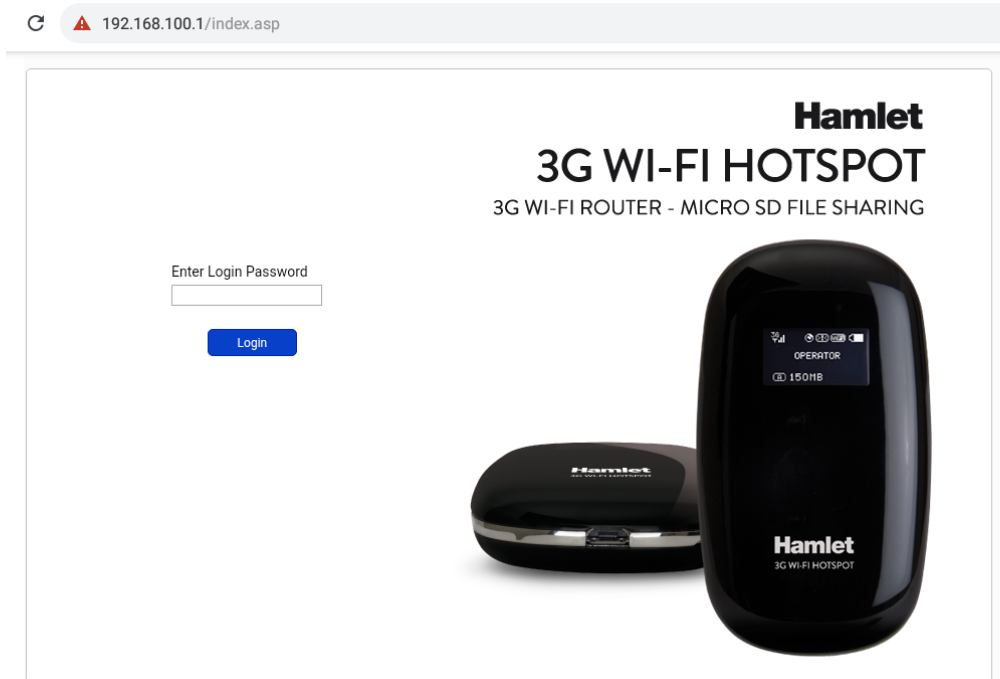


4. In the left menu press "Connection" button and press the "Profile Management" option.

Hamlet 3G WI-FI HOTSPOT			
Quick Setup	Connection Status		
	→ Current Connection		
	Connection Status		
Connection	Status:	Connecting.....	Rate: 0
		0	Roaming: Yes
SMS	Network	0.0.0.0	Network Name: FASTWEB
	PIN Code Management	SIM Ready	Network Type: HSPA
SD Card	Wi-Fi Status		
	SSID:	Hamlet-3G-FBE2	
Settings	Security:	WPA PSK	
Help	User(s):	1/10	

5. In the "Profile Management" window, press the "New" button to add a new APN profile.

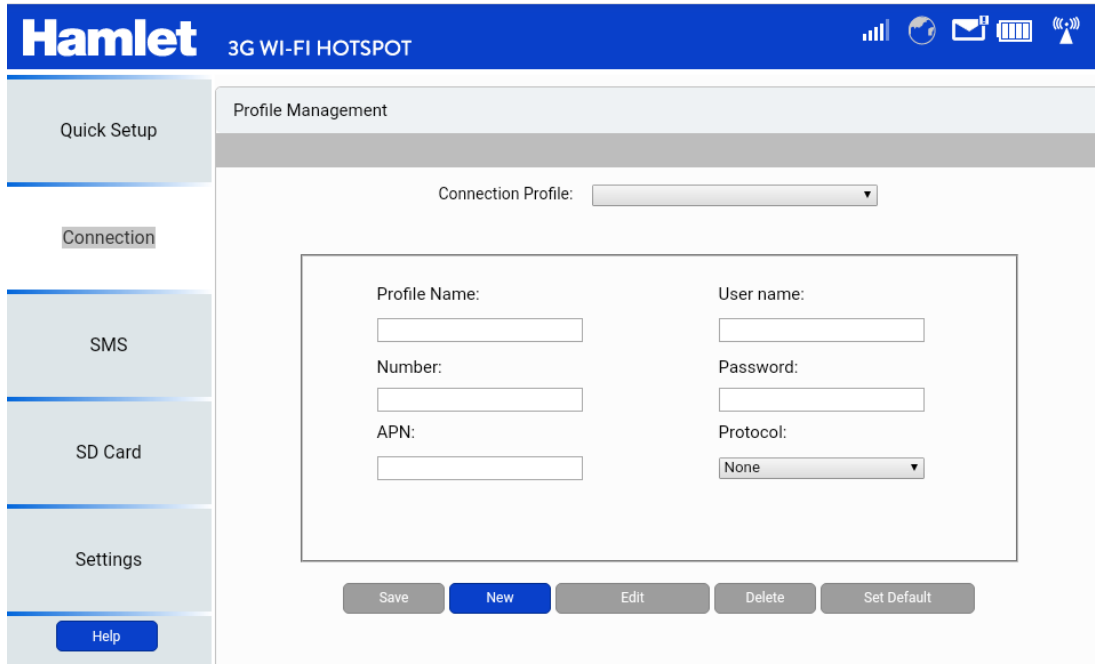


6. Then enter the APN settings of your mobile operator. In the example below are shown the settings for Fastweb mobile operator.

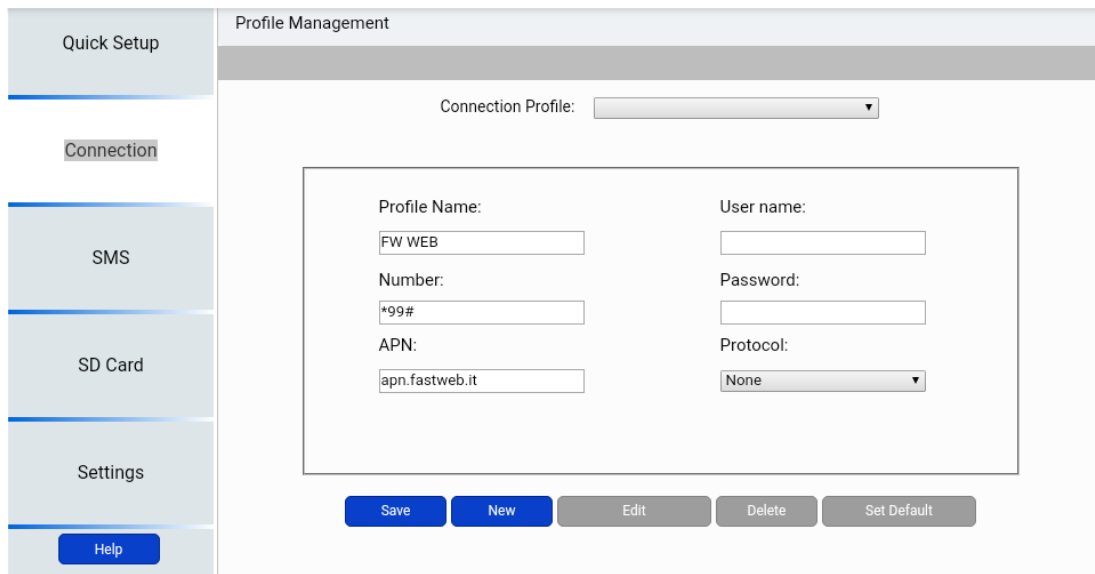

7. Press the "Save" button to save settings.

8. Press the "Set Default" button to use the new APN profile as the default.

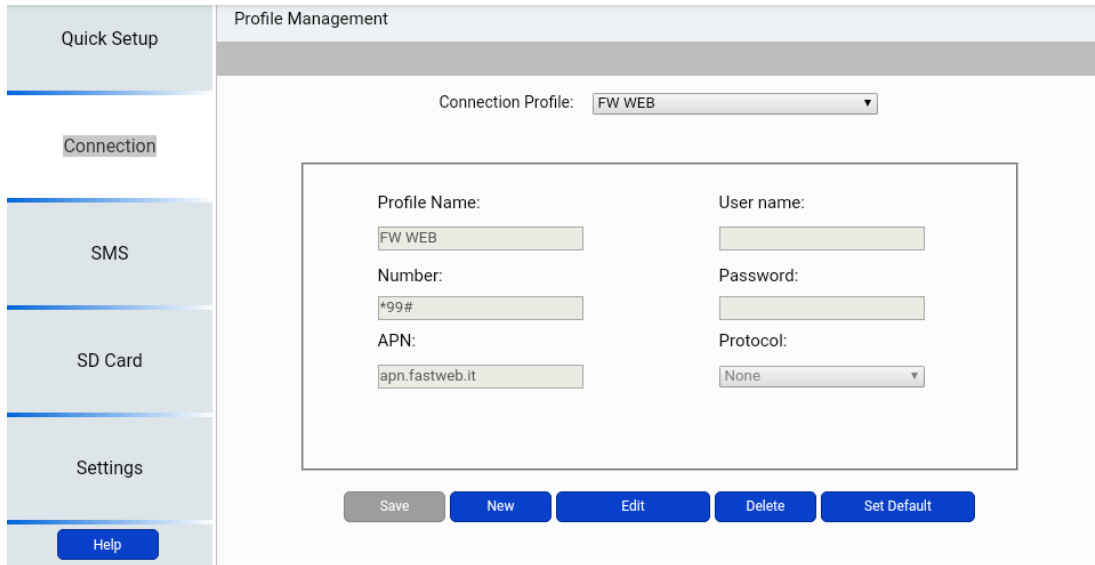

9. Press the "Connection" button on the left menu and select "Connection Status" to check the status information of the connection.

