

Hamlet

**USB 2.0 TO SATA+IDE ADAPTER
HARD DRIVE ADAPTER WITH OTB FUNCTION**



USER MANUAL
XU2SATAIDE

www.hamletcom.com

Dear Customer,

thanks for choosing an Hamlet product. Please carefully follow the instructions for its use and maintenance and, once this item has run its life span, we kindly ask You to dispose of it in an environmentally friendly way, by putting it in the separate bins for electrical/electronic waste, or to bring it back to your retailer who will collect it for free.



WEEE Information (for European Union member users)

According to the WEEE (Waste Electrical and Electronic Equipment) Directive, do not dispose of this product as household waste or commercial waste. Waste electrical and electronic equipment should be appropriately collected and recycled as required by practices established for your country. For information on recycling of this product, please contact your local authorities, your household waste disposal service or the shop where you purchased the product.

We inform You this product is manufactured with materials and components in compliance with RoHS Directive 2002/95/CE, with WEEE Directive 2002/96/CE, 2003/108/CE Italian Legislative Decree 2005/151 and EMC Directive 2004/108/EC for the following standards:

EN 55022: 2006 + A1: 2007

EN 55024: 1998 + A1: 2001 + A2: 2003

EN 61000-3-2: 2006 + A1: 2009 + A2: 2009

EN 61000-3-3: 2008



The **complete CE declaration of conformity** of the product can be obtained by contacting Hamlet at info@hamletcom.com specifying the product code and the documentation.

The information on the importer for your country are available in the "About Us" section of the Hamlet website at www.hamletcom.com.

About this manual

This manual is for information only and may change without notice. Although this document has been compiled with accuracy, Hamlet assumes no responsibility for any errors or omissions and use of information contained in it. Hamlet reserves the right to modify or update the product and the manual without reservation and without notice.

Trademarks

All trademarks and company names mentioned in this manual are used for description purpose only and remain property of their respective owners.

Safety Instructions

Always read the safety instructions carefully.

- Keep this User's Manual for future reference
- Keep this equipment away from humidity

If any of the following situations arises, get the equipment checked by a service technician.

- The equipment has been exposed to moisture.
- The equipment has been dropped and damaged.
- The equipment has obvious sign of breakage.
- The equipment has not been working well or you cannot get it to work according to the User's Manual.

Important information

Any loss, corruption or destruction of data while using a Hamlet device is the sole responsibility of the user, and under no circumstances will Hamlet be held liable for the recovery or restoration of this data. To help prevent the loss of your data, it is highly recommended that you keep TWO copies of your data; one copy on your external hard drive, for instance, and a second copy either on your internal hard drive, another external hard drive or some other form of removable storage media.

1. Introduction

The USB 2.0 to SATA+IDE Adapter allows you to easily connect a Hard Disk, CD-rom player, DVD-rom player or burner to your computer through a standard USB 2.0 port.

Features

- Easily connect IDE and SATA devices using a USB port
- Compatible with 2.5"/3.5" hard drives and 5.25" CD/DVD drives
- High speed USB 2.0 interface up to 480Mbps, backward compatible with USB 1.1
- Provides One-Touch-Backup (OTB) function
- External power adapter and connection cables included
- Plug and Play & Hot-swappable


Package Contents

- USB 2.0 to SATA/IDE Adapter
- USB 2.0 cable
- 7 pin SATA cable
- SATA power cable adapter
- External power adapter
- Utility CD
- User manual

System Requirements

- Windows 98SE/ME/2000/XP/Vista/7 and 8, Mac OS 9 or above
- Standard USB port (USB 2.0 recommended for maximum performance)

Product Overview

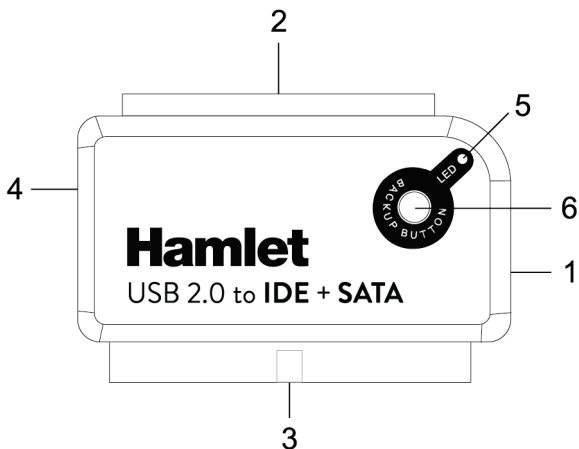

1. USB 2.0 interface (mini USB port)
2. 44 pin IDE connector for 2.5" IDE devices
3. 40 pin IDE connector for 3.5"/5.25" IDE devices
4. Serial ATA interface
5. LED indicator
6. One-Touch-Backup button

2. Installation and use

Connecting a storage device

If you use an IDE hard disk you will need to set it to 'Master'. Check the label on your hard disk for more information on these settings.

1. Connect the XU2SATAIDE adapter to your storage device:
 - For 2.5" IDE devices use the 44 pin IDE connector **(2)**.
 - For 3.5" & 5.25" IDE devices use the 40 pin IDE connector **(3)**.
 - For 2.5", 3.5" or 5.25" SATA devices use the SATA interface **(4)** with the 7 pin SATA cable included.
2. Connect the external power supply to your storage device:
 - For 3.5" & 5.25" IDE devices plug in the IDE power connector of the power supply directly to the device.
 - For SATA devices use the SATA power cable adapter included.
3. Connect the power adapter to a power outlet.
4. Connect the mini USB plug of the USB cable to the mini USB port of the XU2SATAIDE.
5. Connect the USB cable to a free USB port of your computer.
6. The computer will automatically detect the new device and install it.

OTB (One-Touch-Backup) function

The One-Touch-Backup (OTB) function allows you to back up data on external hard drive by pressing a single button on the device. OTB button must be configured with the software supplied with the product (Windows only).

3. Specifications

- High Speed USB 2.0 interface up to 480Mbps
- Backward compatible with USB 1.1
- 44 pin IDE connector for 2.5" IDE devices
- 40 pin IDE connector for 3.5"/5.25" IDE devices
- Serial ATA interface for 2.5"/3.5"/5.25" SATA devices
- OTB (One Touch Backup) function
- External power adapter included
- Dimensions (of the adapter only): 62 × 42 × 12 mm
- Supports Windows 98SE/ME/2000/XP/Vista/7 and 8, Mac OS 9 or above

Specifications and appearance are subject to change without notice.